

# Premium Collection

HOMOGENEOUS VINYL

Combine  
& Create



# CONTENTS

CUSTOMIZED SPACES FOR EVERY MOODS	3
ECLIPSE PREMIUM SPECTRA COLLECTION	4
COMBINE & CREATE	5
ALL YOUR NEEDS COVERED	7
RESISTANCE, HYGIENE AND EFFORTLESS MAINTENANCE	9
DOING GOOD. TOGETHER	11
PREMIUM COLLECTION	12
INSTALLATION INSTRUCTIONS	15
FULL SOLUTION REFERENCES	16
TENDER SPECIFICATION	18
TECHNICAL DATA SHEET	19



Combine & create



ECLIPSE CLASSIC

21020810

+



ECLIPSE SPIRIT

21020969

## CUSTOMIZED SPACES FOR EVERY MOODS

The new homogeneous Premium Collection has been designed to fulfill all your expectations. You can create different moods and environments by mixing patterns and colours. The Tarkett Premium Collection, Eclipse, Primo, and the new range Spectra, is the most functional vinyl flooring solution in non-directional patterns. Its high resistance to chemicals, stains and heavy traffic is particularly adapted to schools, health care facilities and other types of public buildings.


### DESIGN



**+100**  
colours



**4**  
different patterns



**Multicoloured and uni**  
welding rods

### PERFORMANCE



**Attenuated noise**  
With Eclipse Acoustic



**No slipping**  
With Primo Safe T



**Static dissipative**  
With Primo SD

# ECLIPSE PREMIUM SPECTRA COLLECTION

The new Premium Spectra brings pastel and bright colours along with a unique modern style. It helps you to create an inspiring atmosphere, full of energy. Its low contrasted pattern with few accents is the perfect bridge between our Primo and Eclipse collections.



## New design

This new pattern supports your creativity. It offers multiple possibilities for a perfect mix and match.

## 12 brand new colours

These new colours are the best choice to highlight a specific area or to design soothing and modern spaces

# COMBINE & CREATE

Premium is the perfect collection to customize spaces due to its versatility and wide range of colours and patterns. Combine floors to imagine new styles and play with shades to create different atmospheres.



## A brand new pattern


Now 4 patterns to choose from, for unique combination options and a complete aesthetic. Play with highly contrasted patterns for the most demanding areas and patterns with less contrast and few accents for quieter ones.



## Colour your world

Choose from a world of colours and coordination possibilities in line with evolving user needs and lifestyle trends.

**.102** Colours **.50%** new



Available in rolls and tiles, you can play with multiple shapes and formats.

- Tiles : 61 x 61 cm
- Tiles : 30 x 30 cm
- Rolls : 2 m wide



## Multicoloured and Uni welding rods

Unique multicoloured welding rods give the most realistic and seamless look when installed.





# ALL YOUR NEEDS COVERED

The Premium range is a global solution combining attractive design and functional performance, with options available to cover all your needs.



**Attenuated noise**

By absorbing noise, Tarkett acoustic floorings take the edge off busy environments and encourage quiet interaction.


Eclipse Acoustic combines acoustic properties and underfoot comfort with the low cost and simplified maintenance of Eclipse Premium.

For underfoot comfort we have tested Eclipse Acoustic for: indentation under static loading (measured after 15 s under load in accordance to ISO 24343-1) to be  $\geq 0,40$  mm.

### Eclipse Acoustic (Spectra colours)

Eclipse Acoustic is available in the 12 Spectra astonishing new colours.

The foam underlayer provides up to **17dB** impact sound reduction and walking comfort.



**No slipping**

Primo Safe.T is a homogeneous vinyl safety flooring with anti-slip particles throughout its thickness which assures continued surface grip during the products entire lifetime. The surface is strengthened and made easier to maintain by Safety Clean XP, a photoreticulated polyurethane treatment.

Primo Safe.T, **R10** grip, is available in 15 core matching colours.



© 21013792



**Static Dissipative**

Primo SD, the static dissipative option is available in 8 core matching colours.



© 21012562

Combine & create






# RESISTANCE, HYGIENE AND EFFORTLESS MAINTENANCE



**PUR treatment reinforces durability**

and makes the surface more resistant to heavy traffic and easier to clean.



**Traffic resistance**

Premium is specifically designed for heavy traffic zones where hygiene and resistance are critical such as schools, hospitals and public buildings.

Residual indentation **0.03 mm\***  
\*Best measured value



**Practical hygiene & maintenance**

**No additional surface treatment** needed. Premium benefits from PUR reinforcement which simplifies cleaning and maintenance.


**Impenetrable heat welding joints. Impervious surface for maximum hygiene.**

Premium collection offers highly flexible flooring solutions for perfect coving results, ensuring an easy and improved maintenance.


**Joints resist tearing when stretched using over 400N of force per 50mm**

## PUR Reinforced chemical resistance.

Eosin 1% in Ethanol - 2 hours' exposure after cleaning with heavy-duty, spray-and-wipe power cleaner.

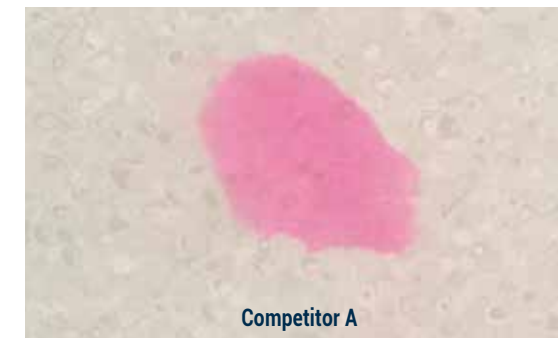


Competitor A

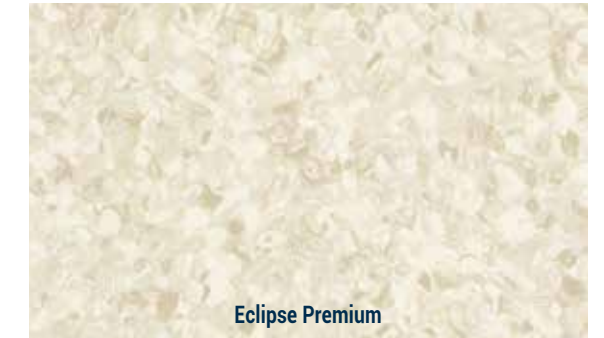

Eclipse Premium

Combine & create



  
**PRIMO PREMIUM**    **ECLIPSE SPECTRA**  
 21010600    21081078





# DOING GOOD. TOGETHER

At Tarkett, we strive to support both our professional clients and consumers in creating healthy, beautiful and sustainable living spaces. Working with industry partners, we're bringing our best thinking and efforts toward making a positive impact on people and the planet.



## Designing for life

Developing products based on Cradle to Cradle® principles that contribute to people friendly spaces AND respect the planet's natural capital.



## Healthy spaces thanks to 100% phthalate-free product

We have been proactive in seeking alternatives to phthalates as they have been the subject of scientific debate about their potential impact on human health.

Since 2010, we have developed the use of a phthalate-free plasticizer technology for our vinyl floors which is approved for food containers and toys intended to be placed in the mouth by children.



## Good indoor air quality

Through low levels of total volatile organic compounds (TVOCs) - TVOCs  $\leq 10 \mu\text{g}/\text{m}^3$ , much lower than EU standard EN ISO 16000.



## Closing the loop

Building a circular economy inclusive of programs and business models that encourage take-back, recycling, reuse and elimination of waste.

Premium Collection is eligible to ReStart®, Tarkett's take-back program which can help customers manage their installation waste while ensuring it is recycled.

We're committed to a circular economy where resources are continually reused and recycled—creating products today that become the raw materials

of tomorrow. Premium Collection contains over 25% of recycled material.



## Driving collaboration


Inviting others to join us in Doing Good through education, collaboration, transparency and communication.

# PREMIUM COLLECTION

## ECLIPSE PREMIUM CLASSIC




# ECLIPSE PREMIUM SPECTRA

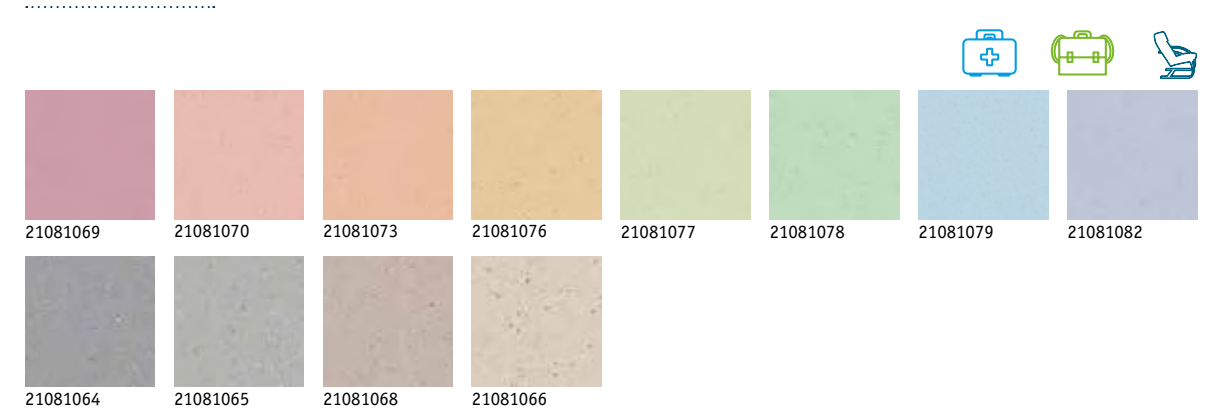

# ECLIPSE PREMIUM SPIRIT




# PRIMO PREMIUM

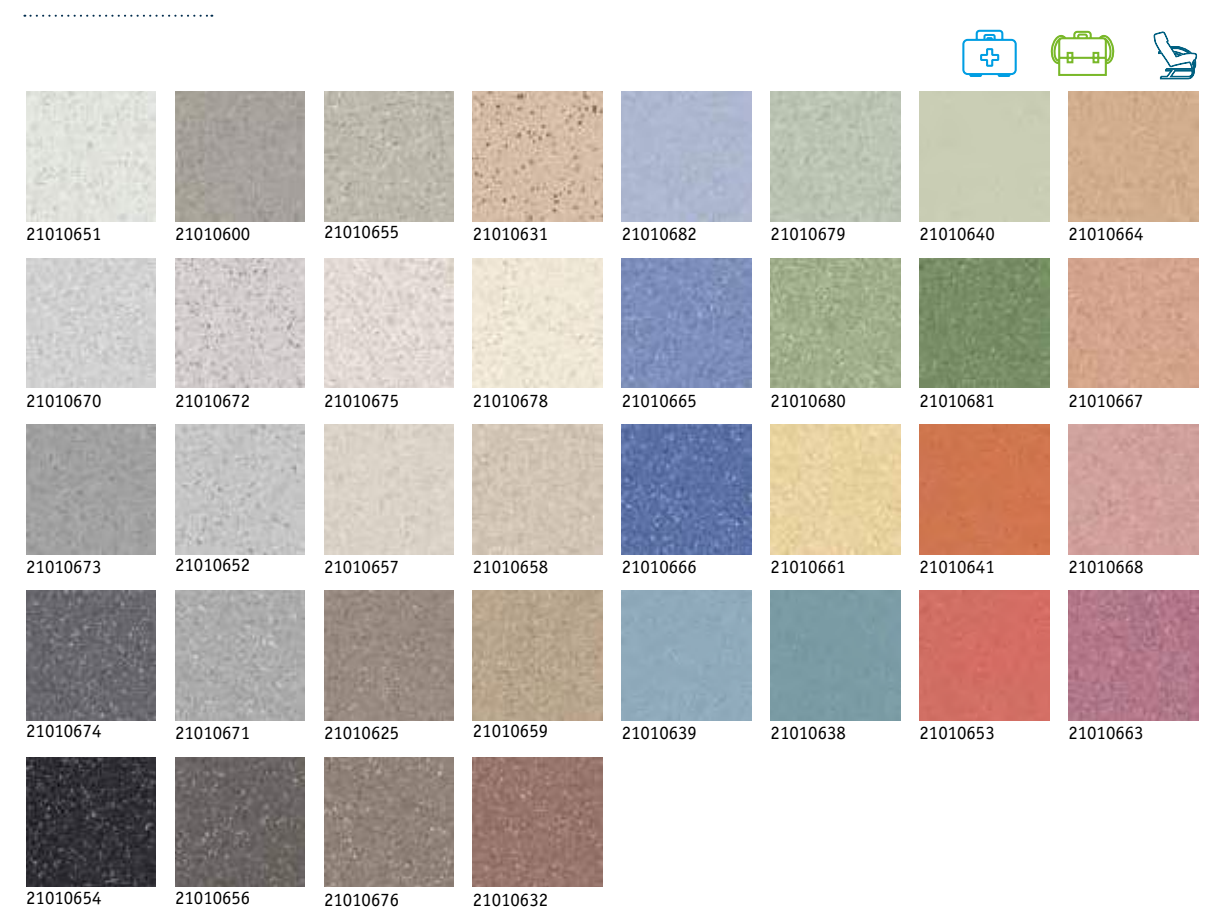




# PREMIUM COLLECTION

## PRIMO SAFE. T

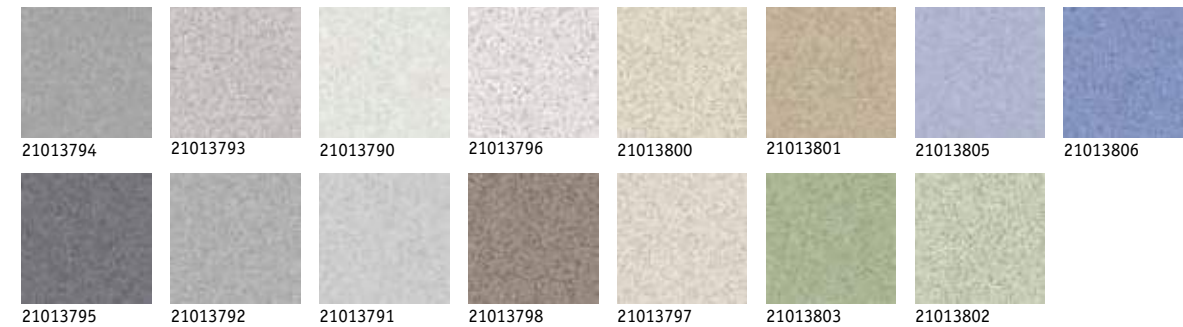

## PRIMO SD

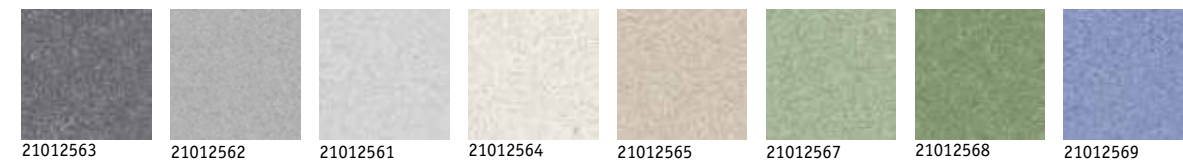

### Primo Safe T and Primo SD coordination table with other Premium ranges

Primo Safe T and Primo SD ranges can be coordinated as well with Eclipse Premium collection. The table below shows how patterns and colors can be mixed for a consistent result.

PRIMO SAFE.T		PRIMO PREMIUM		ECLIPSE PREMIUM SPIRIT		ECLIPSE PREMIUM CLASSIC	
Product No	Colour No	Product No	Colour No	Product No	Colour No	Product No	Colour No
21013	790	21010	651	21020	963	21020	038
21013	791	21010	670	21020	964	21020	039
21013	792	21010	671	21020	965	21020	040
21013	793	21010	672	21020	701	21020	026
21013	794	21010	673	21020	967	21020	035
21013	795	21010	674	21020	968	21020	012
21013	796	21010	675	21020	969	21020	645
21013	797	21010	657	21020	970		
21013	798	21010	676	21020	720	21020	809
21013	800	21010	658	21020	973	21020	036
21013	801	21010	659	21020	974		
21013	802	21010	679	21020	975		
21013	803	21010	680	21020	976	21020	010
21013	805	21010	682	21020	978		
21013	806	21010	665	21020	979	21020	730

PRIMO SD		PRIMO PREMIUM		ECLIPSE PREMIUM SPIRIT		ECLIPSE PREMIUM CLASSIC	
Product No	Colour No	Product No	Colour No	Product No	Colour No	Product No	Colour No
21012	561	21010	670	21020	964	21020	039
21012	562	21010	671	21020	967	21020	040
21012	563	21010	674	21020	968	21020	012
21012	564	21010	675	21020	969	21020	645
21012	565	21010	658	21020	973	21020	036
21012	567	21010	680	21020	976	21020	010
21012	568	21010	681				
21012	569	21010	665	21020	979		730

# INSTALLATION INSTRUCTIONS


## STEPS IN INSTALLATION

### 1. Subfloor control

- The subfloor must be clean, hard, flat and free from all types of marks, debris & residues, and not exposed to humidity.
- Damp proofing to be carried out according to local building standards. -When installing this product on concrete subfloors that do not include damp-proofing, the moisture content measured in terms of relative humidity must not be higher than 85% (in UK and Ireland 75% according to BS 8203). Or less than 2% with CM (Carbide Method).
- Refer to local standards for detailed rules and control methods.
- Stop underfloor heating for minimum 48h before installation and maintain the temperature in the room with an alternative heating source. Remain turned off for 6-7 days and then ramped up.

in the premises should be 35-65%. Maintain same temperature and humidity for at least 72 hours after installation.

- If material from several rolls is used, they should have the same manufacturing serial numbers and be used in consecutive order.

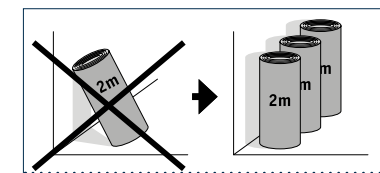


### 3. Rolls installation

- Cut the sheets to length and lay them out to acclimatise and relax prior to installation. This is particularly important for longer lengths.
- Sheets must be installed so that colour differences are avoided. Reverse sheets whenever possible, overlap and cut edges.

### 4. Hot welding



- The sheets are hot welded. Do not weld until the adhesive has bonded completely, wait 24-48h. The joints are chamfered or grooved to about 3/4 of the thickness using a hand grooving tool or machine prior to welding.
- Weld with hot-air and Tarkett Speed Welding Nozzle. Welded seams must cool to room temperature before trimming in two steps, rough and fine trimming

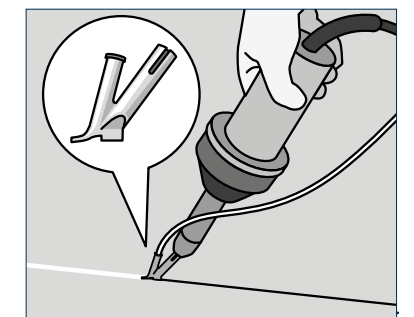

### 5. After installation

- The sheets are fully adhered with an adhesive approved for Tarkett's homogeneous vinyl sheet, spatula A1/A2. See the adhesive manufacturer's instruction regarding coverage, open time etc. Example of suitable adhesives can be found at professionals.tarkett.com
- Rub the face surface down thoroughly to ensure that the floor covering makes good contact with the adhesive and that all air is expelled. Make sure that the tool used for rubbing down the floor covering does not scratch the surface. A broom is not suitable for this purpose. Use a floor roller (approx. 65 kg) and roll crosswise over the floor.
- Always protect the floor with thick paper, hard board or similar during the construction period. If using tape, this must not be applied directly to the floor surface.
- IMPORTANT! Restrict foot traffic for 24 hours after installation. No heavy traffic, rolling loads or furniture placement for 72 hours after installation. Most suppliers of floor adhesives specify 72 hours before the final strength is achieved."

For more detailed explanations, or specific installation methods (tiles installation, wet room concept, cove forming), please refer to full installation notice. Please contact your local representative for any questions. Tarkett accepts no liability for adhesives and levelling compounds used, including those recommended.

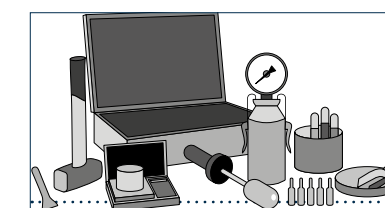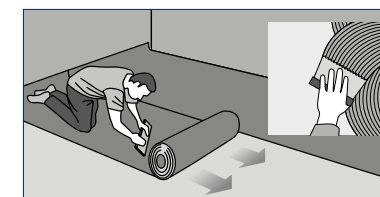

### 2. Before installation

- Store the rolls upright in a safe position with distance between the rolls.
- Prior to laying, allow the material, adhesive and subfloor to reach room temperature, i.e. a temperature of at least 15°C. The relative air humidity should be 30-60%. Rolls must be stored indoors at least 24 hours before installation, preferable 48 hours.
- Installation should be carried out at room temperature between 18°C to 26°C. Subfloor temperature must be at least 15°C. The relative air humidity



# FULL SOLUTION REFERENCES

## Eclipse Premium Classic

Colours name	NCS	LRV	Roll	Tile 30x30	Tile 61x61	Acoustic	Welding rods	
							Uni	Multi
medium gold	S 2020-Y20R	50%	21020004	21022004	21021004	-	-	1290 270
medium green	S 3020-G30Y	37%	21020010	21022010	21021010	-	-	1290 265
dark cool grey	S 6502-B	15%	21020012	21022012	21021012	-	-	1290 192
light warm grey	S 2500-N	50%	21020026	21022026	21021026	-	-	1290 190
medium cool grey	S 3502-B	37%	21020035	21022035	21021035	-	-	1290 191
medium warm beige	S 2005-Y40R	71%	21020036	21022036	21021036	-	-	1290 264
light pure grey	S 1000-N	74%	21020038	21022038	21021038	-	-	1290 262
medium pure grey	S 2002-R50B	56%	21020039	21022039	21021039	-	-	1290 028
medium grey	S 4000-N	34%	21020040	21022040	21021040	-	-	1290 189
medium grey blue	S 3020-R80B	32%	21020067	21022067	21021067	-	-	1290 272
light cool beige	S 1002-Y50R	74%	21020645	21022645	21021645	-	-	1290 193
white blue	S 2020-R80B	43%	21020669	21022669	21021669	-	-	1290 371
white green	S 2020-G30Y	50%	21020677	21022677	21021677	-	-	1290 372
medium blue	S 3030-R90B	28%	21020730	21022730	21021730	-	-	1290 197
white grey	S 4500-N	30%	21020787	21022787	21021787	-	-	1290 373
white beige	S 2005-Y40R	71%	21020808	21022808	21021808	-	-	1290 374
white clay grey	S 4005-Y50R	31%	21020809	21022809	21021809	-	-	1290 375
white brown	S 7005-Y50R	13%	21020810	21022810	21021810	-	-	1290 376

## Eclipse Premium Spirit

Colours name	NCS	LRV	Roll	Tile 30x30	Tile 61x61	Acoustic	Welding rods	
							Uni	Multi
light grey	S 2000-N	57%	21020701	21022701	21021701	-	-	1290 356
black	S 8502-B	6%	21020707	21022707	21021707	-	-	1290 390
dark warm grey	S 6502-Y	16%	21020708	21022708	21021708	-	-	1290 391
warm grey	S 3502-Y	38%	21020709	21022709	21021709	-	-	1290 122
medium grey	S 4500-N	30%	21020717	21022717	21021717	-	-	1290 170
dark clay grey	S 6005-Y50R	24%	21020720	21022720	21021720	-	-	1290 392
dark brown	S 7005-Y50R	13%	21020725	21022725	21021725	-	-	1290 309
yellow	S 1040-Y20R	60%	21020732	21022732	21021732	-	-	1290 166
sand	S 2010-Y30R	56%	21020767	21022767	21021767	-	-	1290 393
dark bric	S 5020-Y70R	19%	21020768	21022768	21021768	-	-	1290 394
light olive green	S 2020-G60Y	50%	21020769	21022769	21021769	-	-	1290 395
green	S 3030-G20Y	32%	21020771	21022771	21021771	-	-	1290 396
ocean blue	S 3030-B10G	29%	21020773	21022773	21021773	-	-	1290 397
light ocean blue	S 2020-B10G	44%	21020774	21022774	21021774	-	-	1290 398
midnight blue	S 5030-R80B	12%	21020775	21022775	21021775	-	-	1290 399
red purple	S 3050-R20B	15%	21020776	21022776	21021776	-	-	1290 400
light red	S 1030-Y90R	48%	21020781	21022781	21021781	-	-	1290 401
red	S 2060-Y80R	22%	21020783	21022783	21021783	-	-	1290 402
orange	S 1050-Y60R	41%	21020784	21022784	21021784	-	-	1290 403
light orange	S 1020-Y40R	61%	21020785	21022785	21021785	-	-	1290 404
light yellow	S 1020-Y20R	65%	21020786	21022786	21021786	-	-	1290 405
light pure grey	S 1502-R	63%	21020963	21022963	21021963	-	-	1290 214
medium pure grey	S 2002-R50B	56%	21020964	21022964	21021964	-	-	1290 167
grey	S 3000-N	45%	21020965	21022965	21021965	-	-	1290 168
medium cool grey	S 3502-B	37%	21020967	21022967	21021967	-	-	1290 237
dark cool grey	S 6502-B	15%	21020968	21022968	21021968	-	-	1290 171
light cool beige	S 1505-Y60R	62%	21020969	21022969	21021969	-	-	1290 172
medium cool beige	S 2005-Y60R	54%	21020970	21022970	21021970	-	-	1290 200
light beige	S 1005-Y40R	71%	21020972	21022972	21021972	-	-	1290 128
medium warm beige	S 2005-Y40R	55%	21020973	21022973	21021973	-	-	1290 174
dark warm beige	S 3010-Y40R	39%	21020974	21022974	21021974	-	-	1290 175
light green	S 2010-G30Y	53%	21020975	21022975	21021975	-	-	1290 176
medium green	S 3020-G30Y	37%	21020976	21022976	21021976	-	-	1290 177
light blue	S 2020-R80B	43%	21020978	21022978	21021978	-	-	1290 211
medium blue	S 3030-R80B	27%	21020979	21022979	21021979	-	-	1290 205
clay grey	S 4005-Y50R	31%	21020988	21022988	21021988	-	-	1290 203

## Eclipse Premium Spectra

Colours name	NCS	LRV	Roll	Tile 30x30	Tile 61x61	Acoustic	Welding rods	
							Uni	Multi
soft steel grey	S 3502-B	37%	21081064	21084064	21083064	21085064	1287 459	-
soft grey	S 2500-N	50%	21081065	21084065	21083065	21085065	1287 880	-
soft sand	S 1505-Y30R	64%	21081066	21084066	21083066	21085066	1287 773	-
soft clay	S 2005-Y50R	54%	21081068	21084068	21083068	21085068	1292 393	-
pastel purple	S 2020-R20B	43%	21081069	21084069	21083069	21085069	1287 881	-
pastel red	S 1015-Y80R	63%	21081070	21084070	21083070	21085070	1287 887	-
pastel orange	S 1020-Y50R	62%	21081073	21084073	21083073	21085073	1287 898	-
pastel yellow	S 1020-Y20R	65%	21081076	21084076	21083076	21085076	1287 899	-
pastel olive	S 1015-G60Y	70%	21081077	21084077	21083077	21085077	1287 900	-
pastel green	S 1015-G20Y	67%	21081078	21084078	21083078	21085078	1287 901	-
pastel sky blue	S 1015-B	63%	21081079	21084079	21083079	21085079	1287 886	-
pastel blue	S 1015-R80B	63%	21081082	21084082	21083082	21085082	1287 902	-

## Primo Premium

Colours name	NCS	LRV	Roll	Tile 30x30	Tile 61x61	Acoustic	Welding rods	
							Uni	Multi
medium warm grey	S 3502-Y	38%	21010600	-	21011600	-	-	1290 377
clay grey	S 4005-Y50R	31%	21010625	-	21011625	-	-	1290 378
sand	S 2010-Y30R	56%	21010631	-	21011631	-	-	1290 379
dark bric grey	S 5010-Y70R	21%	21010632	-	21011632	-	-	1290 380
ocean blue	S 3020-B10G	34%	21010638	-	21011638	-	-	1290 381
sky blue	S 2020-B	46%	21010639	-	21011639	-	-	1290 382
white olive green	S 1510-G60Y	62%	21010640	-	21011640	-	-	1290 383
dark orange	S 2050-Y60R	30%	21010641	-	21011641	-	-	1290 384
light pure grey	S 1000-N	74%	21010651	-	21011651	-	-	1290 152
grey	S 2500-N	50%	21010652	-	21011652	-	-	1290 153
light red	S 2050-Y80R	28%	21010653	-	21011653	-	-	1290 385
black	S 8502-B	6%	21010654	-	21010654	-	-	1290 155
medium grey beige	S 3005-Y20R	42%	21010655	-	21011655	-	-	1290 156
dark warm grey	S 6502-Y	16%	21010656	-	21011656	-	-	1290 157
medium cool beige	S 2005-Y50R	54%	21010657	-	21011657	-	-	1290 158
medium warm beige	S 2005-Y40R	55%	21010658	-	21011658	-	-	1290 159
dark warm beige	S 3010-Y40R	39%	21010659	-	21011659	-	-	1290 160
light yellow	S 1020-Y30R	65%	21010661	-	21011661	-	-	1290 162
soft purple	S 3030-R20B	26%	21010663	-	21011663	-	-	1290 386
soft yellow	S 2020-Y30R	50%	21010664	-	21011664	-	-	1290 387
medium blue	S 3030-R80B	27%	21010665	-	21011665	-	-	1290 164
dark blue	S 4040-R90B	15%	21010666	-	21011666	-	-	1290 165
soft orange	S 2020-Y50R	46%	21010667	-	21011667	-	-	1290 388
soft red	S 2020-Y90R	44%	21010668	-	21011668	-	-	1290 389
medium pure grey	S 2002-R50B	56%	21010670	-	21011670	-	-	1290 222
medium grey	S 4000-N	34%	21010671	-	21011671	-	-	1290 022
light warm grey	S 2002-Y50R	56%	21010672	-	21011672	-	-	1290 220
medium cool grey	S 4502-B	29%	21010673	-	21011673	-	-	1290 225
dark cool grey	S 6502-B	15%	21010674	-	21011674	-	-	1290 228
light cool beige	S 1505-Y60R	62%	21010675	-	21011675	-	-	1290 229
dark cool beige	S 5005-Y50R	24%	21010676	-	21011676	-	-	1290 218
light beige	S 1005-Y40R	71%	21010678	-	21011678	-	-	1290 232
light green	S 2010-G30Y	53%	21010679	-	21011679	-	-	1290 219
medium green	S 3020-G30Y	37%	21010680	-	21011680	-	-	1290 059
dark green	S 4030-G30Y	24%	21010681	-	21011681	-	-	1290 233
light blue	S 2020-R80B	43%	21010682	-	21011682	-	-	1290 234

## Primo Safe.T

Colours name	NCS	LRV	Roll	Tile 30x30	Tile 61x61	Acoustic	Welding rods	
							Uni	Multi
light pure grey	S 1000-N	74%	21013790	-	-	-	-	1290 369
medium pure grey	S 2002-R50B	56%	21013791	-	-	-	-	1290 284
medium grey	S 4000-N	34%	21013792	-	-	-	-	1290 285
light warm grey	S 2002-Y	56%	21013793	-	-	-	-	1290 286
medium cool grey	S 3502-B	37%	21013794	-	-	-	-	1290 287
dark cool grey	S 6502-B	15%	21013795	-	-	-	-	1290 288
light cool beige	S 1502-Y50R	64%	21013796	-	-	-	-	1290 289
medium cool beige	S 1505-Y50R	63%	21013797	-	-	-	-	1290 290
dark cool beige	S 5005-Y50R	24%	21013798	-	-	-	-	1290 291
medium warm beige	S 2005-Y40R	55%	21013800	-	-	-	-	1290 293
dark warm beige	S 3010-Y30R	41%	21013801	-	-	-	-	1290 368
light green	S 2010-G30Y	53%	21013802	-	-	-	-	1290 295
medium green	S 3020-G30Y	37%	21013803	-	-	-	-	1290 296
light blue	S 2020-R80B	43%	21013805	-	-	-	-	1290 370
medium blue	S 3030-R80B	27%	21013806	-	-	-	-	1290 299

## Primo SD

Colours name	NCS	LRV	Roll	Tile 30x30	Tile 61x61	Acoustic	Welding rods	
							Uni	Multi
medium pure grey	S 2002-R50B	56%	21012561	-	21016561	-	-	1290 274
medium grey	S 3500-N	39%	21012562	-	21016562	-	-	1290 275
dark cool grey	S 6502-B	15%	21012563	-	21016563	-	-	1290 276
light cool beige	S 1502-Y50R	64%	21012564	-	21016564	-	-	1290 277
medium warm beige								

# TENDER SPECIFICATION

## Eclipse Premium

The selected flooring similar to Eclipse Premium belongs to the compact vinyl floors category under the ISO standard 15081, available in 2m wide sheet with a Binder Content of Type I.

**The product formulation does not contain phthalate based plasticizer.** The product is a pressed homogeneous vinyl flooring and contains over 25% of recycled material.

The product is reinforced with a UV photo crosslinked polyurethane, X-treme Reinforcement xr™, which suppresses any wax and regenerating polish spray maintenance operations.

The product is installed **with multicolour welding rods to ensure seamless finish.**

Its emission rate of volatile organic compounds in air is very low, measured after 28 days according to EN 16516 standard. Close to zero emission (quantification limit), **TVOC, TSVOC and formaldehyde emissions are below than 10 µg/m³.**

It is free of formaldehyde and **100% REACH compliant.**

It is 100% recyclable and installation off-cuts can be collected and recycled in the products through the Tarkett ReStart® program.

Eclipse Premium comes with a **10 Year Warranty.**

## Primo Premium

The selected flooring similar to Primo Premium belongs to the compact vinyl floors category under the ISO standard 15081, available in 2m wide sheet with a Binder Content of Type I.

**The product formulation does not contain phthalate based plasticizer.** The product is a pressed homogeneous vinyl flooring and contains over 25% of recycled material.

The product is reinforced with a UV photo crosslinked polyurethane, X-treme Reinforcement xr™, which suppresses any wax and regenerating polish spray maintenance operations.

The product is installed **with multicolour welding rods to ensure seamless finish.**

Its emission rate of volatile organic compounds in air is very low, measured after 28 days according to EN 16516 standard. Close to zero emission (quantification limit), **TVOC, TSVOC and formaldehyde emissions are below than 10 µg/m³.**

It is free of formaldehyde and **100% REACH compliant.**

It is 100% recyclable and installation off-cuts can be collected and recycled in the products through the Tarkett ReStart® program.

Primo Premium comes with a **10 Year Warranty.**

### More excellent reasons to choose Premium Collection

- ✓ 100% Phthalate Free
- ✓ Zero formaldehyde
- ✓ 100% recyclable
- ✓ Test reports and certificates available upon request
- ✓ Optimal indoor air quality
- ✓ TVOC <10µg/m³ after 28 days
- ✓ FloorScore® certified
- ✓ ISO 14001 certified production site
- ✓ REACH Compliant and CE Marking

# TECHNICAL DATA SHEET

TECHNICAL DATA	STANDARD	ECLIPSE PREMIUM	ECLIPSE ACOUSTIC	PRIMO PREMIUM	PRIMO SAFE.T	PRIMO SD
<b>CLASSIFICATION</b>						
Classification	ISO 10581	Homogeneous vinyl flooring	-	Homogeneous vinyl flooring	-	Static dissipative pressed homogeneous vinyl flooring
	ISO 11638	-	Homogeneous vinyl flooring with foam interlayer	-	-	-
	EN 13845	-	-	-	Slip resistant homogeneous vinyl flooring	-
	EN ISO 10874	34-43	34-42	34-43	34-43	34-43
Wear layer binder content	ISO 10581	Type I	-	Type I	-	Type I
	ISO 11638	-	Type II	-	-	-
<b>TECHNICAL CHARACTERISTICS</b>						
Total thickness	EN ISO 24346	2.0 mm	3.7 mm	2.0 mm	2.0 mm	2.0 mm
Total weight	EN ISO 23997	3000 g/m²	3600 g/m²	3000 g/m²	3000 g/m²	3000 g/m²
Wear layer thickness	EN ISO 24340	-	2.0 mm	-	-	-
Foam layer thickness	EN ISO 24340	-	1.5 mm	-	-	-
Adhesive foil thickness	EN ISO 24340	-	0.2 mm	-	-	-
Surface treatment	-	PUR reinforced	PUR reinforced	PUR reinforced	Safe.T clean XP®	-
Form of delivery	EN ISO 24341 Sheet (rolls)	Approx. 23 lm x 200 cm Classic / Spirit: Art. no. 21020_... Spectra: Art. no. 21081_...	Approx. 23 lm x 195 cm Art. no. 21085_... 3 digit colour number	Approx. 23 lm x 200 cm Art. no. 21010_... 3 digit colour number	Approx. 23 lm x 200 cm Art. no. 21013_... 3 digit colour number	Approx. 23 lm x 200 cm Art. no. 21012_... 3 digit colour number
	EN ISO 24342 Tiles (box)	61 x 61 cm - 16 tiles/box = 5.95 m² Classic / Spirit: Art. no. 21021_... Spectra: Art. no. 21083_... 30 x 30 cm - 50 tiles/box = 4.50 m² Classic / Spirit: Art. no. 21022_... Spectra: Art. no. 21084_...	-	61 x 61 cm - 14 tiles/box = 5.21 m² Art. no. 21011_... 3 digit colour number	-	61 x 61 cm - 16 tiles/box = 5.95 m² Art. no. 21016_... 3 digit colour number
<b>PERFORMANCES FOR CE MARKING REQUIREMENTS (EN 14041)</b>						
Declaration of Performance	EN 14041	0019-0020-DoP-2013-07	0019-0050-DoP-2013-07	0019-0018-DoP-2013-07	0019-0048-DoP-2013-07	0019-0047-DoP-2013-07
Reaction to fire	EN 13501-1 EN ISO 9239-1 EN ISO 11925-2	Class B <sub>s</sub> -s1 ≥ 8 kW/m² Pass	Class B <sub>s</sub> -s1 ≥ 8 kW/m² Pass	Class B <sub>s</sub> -s1 ≥ 8 kW/m² Pass	Class B <sub>s</sub> -s1 ≥ 8 kW/m² Pass	Class B <sub>s</sub> -s1 ≥ 8 kW/m² Pass
Electrostatic properties	EN 1815	< 2 kV	-	< 2 kV	< 2 kV	< 2 kV
Thermal resistance	EN 12667/DIN 52612	Approx. 0.01 m² K/W	Approx. 0.01 m² K/W	Approx. 0.01 m² K/W	Approx. 0.01 m² K/W	Approx. 0.01 m² K/W
Slip resistance	EN 13893 BS 7976-2	≥ 0.3 Low risk of slip	≥ 0.3 Low risk of slip	≥ 0.3 Low risk of slip	≥ 0.3 Low risk of slip	≥ 0.3 Low risk of slip
<b>TECHNICAL PERFORMANCES</b>						
Residual indentation	EN ISO 24343-1	Required value: ≤ 0.10 mm Best measured value*: 0.03 mm	Required value: ≤ 0.20 mm -	Required value: ≤ 0.10 mm Best measured value*: 0.03 mm	Required value: ≤ 0.10 mm Best measured value*: 0.03 mm	Required value: ≤ 0.10 mm Best measured value*: 0.03 mm
Impact sound reduction	EN ISO 717/2	-	Approx. +17 dB	-	-	-
Slip resistance	DIN 51130	R9	R9	R9	R10	R9
Clean room test	ASTM F24 F51 ISO 14644-1	Class A -	Class A ISO class 4	Class A ISO class 4	Class A ISO class 4	Class A ISO class 4
Ease of decontamination	ISO 8690	Good	Good	Good	Good	Good
Bacteria resistance	EN ISO 846: Part C	Does not favour growth	Does not favour growth	Does not favour growth	Does not favour growth	Does not favour growth
Chemical resistance	ISO 26987	Good resistance	Good resistance	Good resistance	Good resistance	Good resistance
Castor chair	ISO 4918	Suitable	Suitable	Suitable	Suitable	Suitable
Flexibility	ISO 24344	Pass	Pass	Pass	Pass	Pass
Dimensional stability	EN ISO 23999	≤ 0.40 % for rolls ≤ 0.25 % for tiles	≤ 0.40 % -	≤ 0.40 % for rolls ≤ 0.25 % for tiles	≤ 0.40 % -	≤ 0.40 % for rolls ≤ 0.25 % for tiles
Light fastness	EN ISO 105-B02	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6
Electrical insulation	VDE 0100, Part 600	-	-	-	-	R <sub>i</sub> ≥ 5x10 <sup>4</sup> Ω
Electrical resistance	EN 1081	-	-	-	-	R <sub>i</sub> ≤ 10 <sup>6</sup> Ω
Bare foot test	DIN 51097	-	-	-	Class B (≥ 18°)	-
Seam strength	EN 684	- Individual values: ≥ 400 N/50 mm	Average value: ≥ 240 N/50 mm Individual values: ≥ 180 N/50 mm	Individual values: ≥ 400 N/50 mm	Individual values: ≥ 400 N/50 mm	Average value: ≥ 240 N/50 mm Individual values: ≥ 180 N/50 mm
Underfloor heating	-	Suitable - max. 27°C	Suitable - max. 27°C	Suitable - max. 27°C	Suitable - max. 27°C	Suitable - max. 27°C
<b>ENVIRONMENTAL PERFORMANCES</b>						
Total VOC emissions	ISO 16000-9 Indoor air quality	≤ 10 µg/m³ (after 28 days) Platinum	≤ 10 µg/m³ (after 28 days) Platinum	≤ 10 µg/m³ (after 28 days) Platinum	≤ 10 µg/m³ (after 28 days) Platinum	≤ 10 µg/m³ (after 28 days) Platinum
<b>COLOURS</b>						
		66	12	36	15	8

The above information is subject to modification for the benefit of further improvement. (04/18) \*For information - not binding.  
According to the European Regulation N° 305/2011 for CE Marking, the Declarations of Performance are available on our website [www.tarkett.com](http://www.tarkett.com)  
Tarkett's instructions regarding installation, cleaning and maintenance should be observed. Please contact Tarkett at the address shown for these instructions.  
Colours of the products shown in the photos or samples are indicative only. There may be differences in colours, gloss and embossing structure between the products sold and photos or samples.

CUSTOMS TARIFF : 4820 5000 00





■ **WESTERN EUROPE:** Austria: Tarkett Holding GmbH, Niederlassung Wien – Tel. +43 1 47 88 062 ■ **Belgium:** Tarkett Belux Sprl – Tel. +32 16 35 98 80 ■ **Denmark:** Tarkett A/S – Tel. +45 43 90 60 11 ■ **Finland:** Tarkett Oy – Tel. +358 9 4257 9000 ■ **France:** Tarkett SAS – Tel. +33 1 41 20 42 49 ■ **Germany:** Tarkett Holding GmbH, Bereich Objekt – Tel. +49 62 33 810 ■ **Greece:** Tarkett Monoprosopi Ltd – Tel. +30 210 6745 340 ■ **Italy:** Tarkett S.p.A. – Tel. +39 0744 7551 ■ **Luxembourg:** Tarkett GDL SA – Tel. +352 949 211 8804 ■ **Netherlands:** Tarkett Holding GmbH, Vestiging Nederland – Tel. +31 416 685 491 ■ **Norway:** Tarkett AS – Tel. +47 32 20 92 00 ■ **Portugal:** Tarkett SA – Tel. +351 21 427 64 20 ■ **Spain:** Tarkett Floors S.L. – Tel. +34 91 358 00 35 ■ **Sweden:** Tarkett Sverige AB – Tel. +46 771 25 19 00 ■ **Switzerland:** Tarkett Holding GmbH, Bereich Objekt Schweiz – Tel. +41 043 233 79 24 ■ **Turkey:** Tarkett Aspen – Tel. +90 212 213 65 80 ■ **United Kingdom:** Tarkett Ltd – Tel. +44 (0) 1622 854 040 ■ **EASTERN EUROPE:** Baltic Countries: Tarkett Baltics: Tel. +370 37 262 220 ■ **Czech Republic:** Tarkett org. slozka – Tel. +420 271 001 600 ■ **Hungary:** Tarkett Polska SP Z.O.O. magyarországi fióktelepe – Tel. +36 1 437 8150 ■ **Poland:** Tarkett Polska Sp. z o. o. – Tel. +48 22 16 09 231 ■ **Russian Federation:** ZAO Tarkett RUS – Tel. +7 495 775 3737 ■ **Slovakia:** Tarkett Polska, organizačná zložka – Tel. +421 2 48291 317 ■ **South East Europe:** Tarkett SEE – Tel. +381 21 7557 649 (44) 569 12 21 ■ **Ukraine:** Tarkett UA – Tel. +38 (0) 44 569 12 21 ■ **ASIA AND OCEANIA:** Australia: Tarkett Australia Pty Ltd – Tel. +61 2 88 53 12 00 ■ **China:** Tarkett Floor Covering (Shanghai) Co. Ltd. – Tel. +86 (21) 60 95 68 38 ext 841 ■ **North East Asia:** Tarkett Hong Kong Limited – Tel. +852 2511 8716 ■ **India:** Tarkett France (India Branch) - Tel. +91 11 4352 4073 ■ **South East Asia:** Tarkett Flooring Singapore Pte. Ltd. – Tel. +65 6346 1585 ■ **AFRICA:** Tarkett International: Tel. +33 1 41 20 41 01 ■ **MIDDLE EAST:** Tarkett Middle East: Tel. +961 1 51 3363/4 ■ **Israel:** Tarkett International: Tel. +33 1 41 20 41 01 ■ **NORTH AMERICA:** USA: Tarkett Inc. – Tel. +1 713 869 5811 / Johnsonite – Tel. +1 440 543 8916 ■ **Canada:** Tarkett Inc. – Tel. +1 450 293 173 ■ **LATIN AMERICA:** Brazil: Tarkett - Tel. 55 12.3954 7108 ■ **Argentina - Chile - Uruguay:** Tarkett Latam Mercosur - Tel. +54 11 47 08 07 72 / +54 9 11 44 46 88 82 ■ **Bolivia - Colombia - Ecuador - Panama - Paraguay - Peru - Trinidad and Tobago - Venezuela:** Tarkett - Tel. +55 11 9 8410 9310 / +55 11 95494 0069 ■ **Mexico/Central America:** Tarkett Latam Mexico - Tel. +55 11 98410 9310

21020350805: BR HO - Premium Collection EN - 2018

The designs and photos used in this brochure are for illustration purposes only. They are not contractual images and do not stand for product recommendation. Design: Agence Gecko / Photo: Getty images / Print: Altavia

[www.professionals.tarkett.com](http://www.professionals.tarkett.com)

