





## AIR-FLOW 45% HPL PERFORATED PANEL

**Panel structure** Full steel, independent four corners support structure. Lower plane is ST14 stretched plate, surface plane is SPCC hard steel painted with conductive antistatic epoxy resin. Lock hole in four corners.

**Advantage** High dimensional precision, strong load ability And shockproof. Adjustable height for pedestal, assembly agility, large wire, good exchangeability. High recycled.

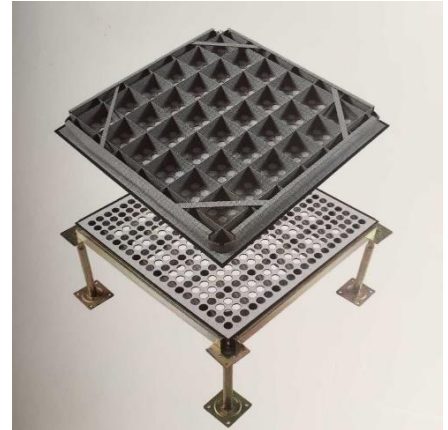

TYPE		FS800
Panel Size		600*600*35mm
Concentrated Load	N	3350
	KG	363
Impact load /N		536
Ultimate Load /N		11558
Uniform Load N/M <sup>2</sup>		16100
Rolling Load /lb	10times	3560
	10000times	2670
Reaction to Fire		A1
Weight per Panel(KG)		13
Pedestal and Stringer		Flat pedestal: Top size:75*75*3mm, Bottom:100*100*3mm,FFH=70cm, Other size can be customized, Galvanized for anti-rust Stringer with gasket

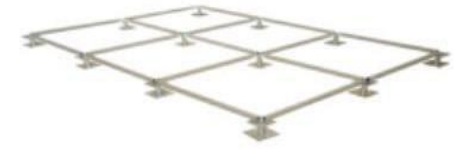

**MATCH IN ONE SQM :**

- PANEL 2.78PCS
- PEDESTAL 3.3PCS
- SCREW 11.2PCS
- STRINGER 5.2PCS

20FT CONTAINERCAPACITY:544M2



**Application:**5A class office building and occasions which require overhead and large wires. Paving carpet, PVC etc for elegant appearance,

