

Product Description
RVP flooring/SPC Flooring
Advantage:

4. Dimension stability:

The rate of expansion and shrink of RCB is less than 0.08%
The rate of expansion and shrink of PVC is less than 0.16%

2. Compressive resistant

Static load less than 0.05mm, which is half of SPC floor.


3. High density

RCB: 2000-2100kg/m³

PVC: 1800kg/m³

WPC: 900-950kg/m³

STRUCTURE

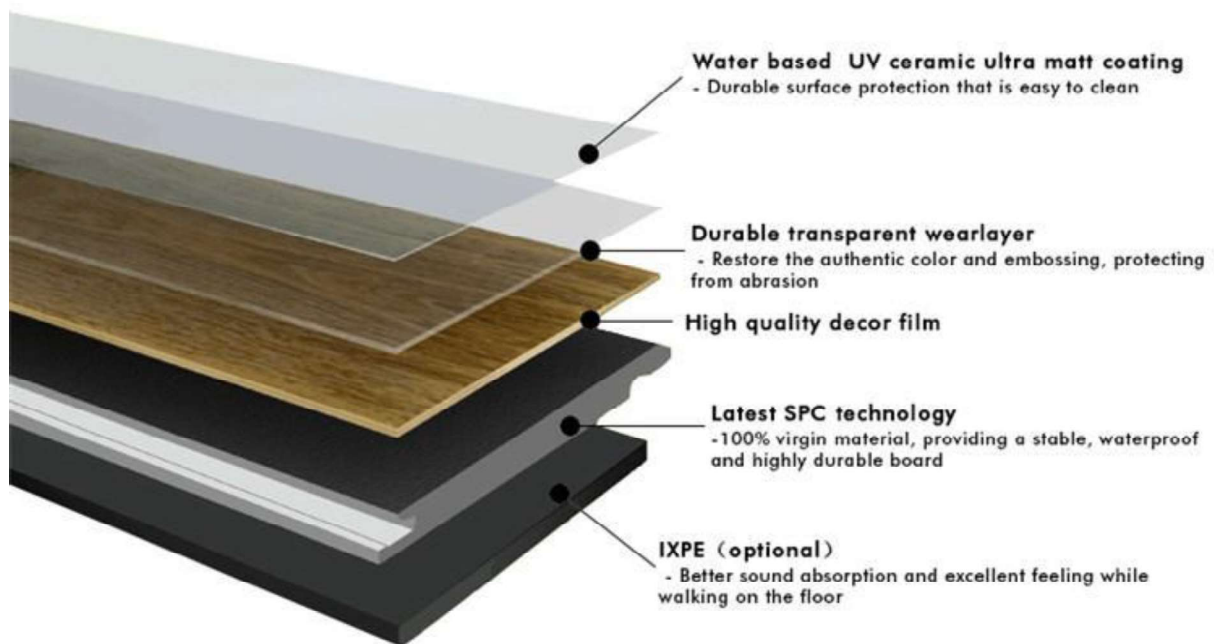

Product Advantage
Comparison

Testament type	SPC	WPC	LVT
Flexibility	Ok	Not good	Not good

Hardness	Ok	Ok	Ok
Stability	Ok	Not good	Excellent
Expansion	≥10mm	≥10mm	≥5mm
Scratch resistance	Excellent	Ok	Ok
Stain resistance	Ok	Ok	Ok
Fireproof	Ok(B1)	Ok(B1)	Ok(B1)
Waterproof	Ok	Ok	Ok



Product Parameter

Wear Layer	0.55mm/20 ml
Thickness	4.5 or 6.5mm

Plank Size:	1220 X 180 X 6.5mm / 4.5 mm
1Backing Layer	100% Virgin SPC
Edge Detail	Squared edge & Beveled edge available
Surface Treatment	UV Coating a German Technology
Surface Texture	Wood Texture Crystal Texture Deep embossed Texture Registered embossed Etc
Origin	China

Product Application

